

U/FTP 4 Pair PowerCat 6A LS0H, Euroclass B2ca -S1a, d1,a1, 500m reel, Violet

Features summary

The PowerCat 6A Shielded Cable is a key component of the PowerCat 6A end-to-end solution.

Molex PowerCat 6A U/FTP Cable is specifically designed to support high speed data network applications such as 10-Gigabyte Ethernet (10GBASE-T). The cable is constructed of 4 screened pairs and a drain wire. This cable minimises alien crosstalk, provides excellent signal isolation and provides superior electromagnetic interference (EMI) protection.

Molex recommends that the full range of PowerCat 6A Shielded products be used in a system to maximise cabling performance. This system is compliant with the latest ISO/IEC 11801 2nd Ed 2.2:2011 and ratified TIA 568-C.2 for the support of cat. 6A and 10GBASE-T

- Reaction to Fire Euroclass – B2ca -s1a d1 a1
- Outstanding signal isolation
- The cable is compliant with ISO/IEC 11801 Ed 2.2:2011 and TIA 568-C.2 and EN 50173:2011
- Enhanced performance 4 pair U/FTP LS0H Cable
- Resistant to alien crosstalk (Alien NEXT) and crosstalk (PS NEXT)
- Colour coded for ease of termination
- Reaction to Fire Euroclas B2ca, -s1a, d1, a1
- RoHS compliant

Commercial Standards

TIA-568-C.2 for category 6A;
 ISO/IEC 11801 Ed.2.2: 2011;
 EN 50173:2011;
 IEC 60332-1 (single vertical cable);
 IEC 60754 (halogen and acid materials);
 IEC 61034 (no dense smoke)
 RoHS compliant

Applications

Category 6A U/FTP Cable is intended for high speed data applications up to 500 MHz including:

- IEEE 802.3 10GBASE-T 10 Gb/s
- IEEE 802.3 1000BASE-T 1 Gb/s
- TIA/EIA-854 1000BASE-TX 1 Gb/s
- ATM 155 Mb/s 155 Mb/s

Fire propagation test

Eu Regulation 305/2011 (CPR)
 EN 50575:2014+A:2016
 Euroclass B2ca -s1a d1 a1 class
 DoP no MLXCES-2017-C-024
 located on the web:
<http://www.molexc.es.co.uk/about-us/our-compliance/cpr/dop-certificates/>

Technical Information

Conductor size [mm]: 23 AWG
 (0.570±0,005)
 Insulated conductor diameter [mm]: 1.350 ±0,05
 Color code: Blue x White, Orange x White, Green x White, Brown x White
 Pair number: 4
 Outside cable diameter [mm]: 7.4±0,5
 Individual pair shield: Aluminium foil, providing 100% coverage, foil face out
 Drain Wire: Yes
 Overall shield: No
 Temperature range [°C]
 during installation: 0°C to +50°C
 during operation: -20°C to +60°C
 during storage: -20°C to +60°C
 Acceptable bend radius
 during installation: 8 x cable size
 during operation: 4 x cable size
 Pulling force: 100N max
 Sheath: LS0H
 Flame test: IEC 60332-1
 Gas & smoke test: IEC 60754 (halogen&acid gas) and IEC 61034 (dense smoke)
 Sheath color LSZH: Violet RAL4005
 Shipping weight [kg]: 28.5
 Cable length tolerance: +/- 5%



Electrical parameters

Characteristic Impedance [Ohm]:
 100±15 @ 1-250 MHz
 100±20 @ 250-500 MHz
 DC Resistance [Ohm/100m]: 9,38 max.
 Resistance unbalance [%]: 2% max.
 Capacitance [nF/100m]: ≤ 5.6
 Voltage rating [Vdc]: 72 max.
 NVP: 74% - printed on a jacket
 Delay Skew [nS/100m]: ≤45
 Insulation Resistance [MegaOhm•Km] 5000 min. @ 500 Vdc

ORDERING INFORMATION

| Order No. | Description |
|--------------|--|
| CAA-00413-VL | U/FTP 4 Pair PowerCat 6A LS0H, Euroclass B2ca -S1a, d1,a1, 500m reel, Violet |

MOLEX PREMISE NETWORKS

Americas
 Tel: 630 969 4550
www.molexpn.com


EMEA
 Tel: 44 (0)2392 205800
www.molexpn.co.uk

APAC
 Tel: 61 3 9971 7111
www.molexpn.com.au

Transmission Properties and Electrical specifications

| Frequency | RL | ATT | NEXT | PHASE DELAY | TCL | PS NEXT | ELFEXT | PSELFEXT | PS ANEXT |
|-----------|------|------|------|-------------|------|---------|--------|----------|----------|
| MHz | ≥ dB | ≤ dB | ≥ dB | ≤ ns | ≥ dB | ≥ dB | ≥ dB | ≥ dB | ≥ dB |
| 1.0 | 20 | 2.1 | 74.3 | 570.0 | 40.0 | 72.3 | 68.0 | 65.0 | 67.0 |
| 4.0 | 23 | 3.8 | 65.3 | 552.0 | 40.0 | 63.3 | 56.0 | 53.0 | 67.0 |
| 8.0 | 24.5 | 5.3 | 60.8 | 546.7 | 40.0 | 58.8 | 49.9 | 46.9 | 67.0 |
| 10.0 | 25.0 | 5.9 | 59.3 | 545.4 | 40.0 | 57.3 | 48.0 | 45.0 | 67.0 |
| 16.0 | 25.0 | 7.5 | 56.2 | 543.0 | 38.0 | 54.2 | 43.9 | 40.9 | 67.0 |
| 20.0 | 25.0 | 8.4 | 54.8 | 542.1 | 37.0 | 52.8 | 42.0 | 39.0 | 67.0 |
| 25.0 | 24.3 | 9.4 | 53.3 | 541.2 | 36.0 | 51.3 | 40.0 | 37.0 | 67.0 |
| 31.25 | 23.6 | 10.5 | 51.9 | 540.4 | 35.1 | 49.9 | 38.1 | 35.1 | 67.0 |
| 62.5 | 21.5 | 15.0 | 47.4 | 538.6 | 32.0 | 45.4 | 32.1 | 29.1 | 65.6 |
| 100 | 20.1 | 19.1 | 44.3 | 537.6 | 30.0 | 42.3 | 28.0 | 25.0 | 62.5 |
| 200 | 18.0 | 27.6 | 39.8 | 536.5 | 27.0 | 37.8 | 22.0 | 19.0 | 58.0 |
| 250 | 17.3 | 31.1 | 38.3 | 536.3 | 26.0 | 36.3 | 20.0 | 17.0 | 56.5 |
| 300 | 16.8 | 34.3 | 37.1 | 536.1 | 25.2 | 35.1 | 18.5 | 15.5 | 55.3 |
| 500 | 15.2 | 45.3 | 33.8 | 535.6 | 23.0 | 31.8 | 14.0 | 11.0 | 52.0 |

U/FTP C6A CABLE

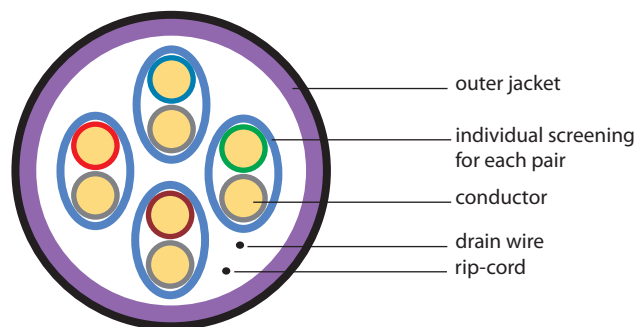

MOLEX PREMISE NETWORKS

Americas
Tel: 630 969 4550
www.molexpn.com

EMEA
Tel: 44 (0)2392 205800
www.molexpn.co.uk

APAC
Tel: 61 3 9971 7111
www.molexpn.com.au