# **FEATURES AND SPECIFICATIONS**

#### **Features and Benefits**

Molex Premise Networks PowerCat 6 (C6) 4 Pair U/UTP cable has been designed to support high speed data transmission systems such as Gigabit Ethernet. The cable is part of the PowerCat 6 range of products that are designed to comply with the Category 6 specification. We recommend that the full range of PowerCat 6 products are used in a system to maximise cabling performance, providing extended frequency response and enhanced bandwidth.

- Enhanced performance 4 pair LSOH cable
- Category 6 compliant
- Colour coded for ease of termination
- 305 metre reel
- RoHS Compliant
- Reaction to Fire Euroclass: B2ca-s1a.d1.a1

#### **Commercial Standards**

ISO/IEC 11801, EIA/TIA -568-C.2, EN 50173-1:2011, IEC 61156-5, IEC 60332-1-2 (332.1), EN50288-5

#### **Fire Propagation Tests**

EU Regulation 305/2011 (CPR) EN 50575:2014+A:2016 EuroClass B2ca-s1a,d1,a1 DoP No: MLXCES-2018-C-026 located on web http://www.molexces.co.uk/about-us/

our-compliance/cpr/dop-certificates/

### **RoHS COMPLIANT**

#### Technical Information

molex

Mechanical CharacteristicsConductor Size:23 AWGPrimary Insulation: HDPESheath Type:LS0HExternal O.D:6.6±0.4 mmSheath Colour:Violet RAL4005Average NVP%:69%


Maximum Pulling force:110N

## **Electrical/Optical Characteristics**

1.0-250.0MHz Impedance ( $\Omega$ ): 100±15 1.0-250.0MHz Delay Skew: (ns/100m) ≤45 DC Resistance ( $\Omega$ /100m) max.: 9.38 DC Conductor Resistance Unbalance (%): Maximum 5.0

# POWERCAT<sup>™</sup> C6 U/UTP CABLE B2ca-s1a,d1,a1



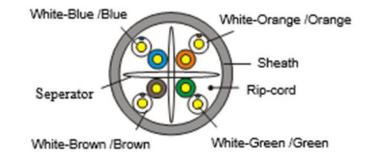

Freq.	RL	ATT (20°C)	NEXT	Phase Delay	PSNEXT	ELFEXT	PSELFEXT
MHz	>dB	>dB	>dB	<ns< td=""><td>&gt;dB</td><td>&gt;dB</td><td>&gt;dB</td></ns<>	>dB	>dB	>dB
1	20	2.03	74.3	570	72.3	67.8	64.8
4	23	3.78	65.3	552	63.3	55.8	52.8
8	24.5	5.32	60.8	546.73	58.8	49.7	46.7
10	25	5.95	59.3	545.38	57.3	47.8	44.8
16	25	7.55	56.2	543	54.2	43.7	40.7
20	26	8.47	54.8	542.05	52.8	41.8	38.8
25	24.3	9.51	53.3	551.2	51.3	39.8	36.8
31.25	23.6	10.67	51.9	540.44	49.9	37.9	34.9
62.5	21.5	15.38	47.7	538.55	45.4	31.9	28.9
100	20.1	19.8	44.3	537.6	42.3	27.8	24.8
200	18	28.98	39.8	536.54	37.8	21.8	18.8
250	17.3	32.85	38.3	536.27	36.3	19.8	16.8

# **ORDERING INFORMATION**

Order No.	SAP No.	Description
CAA-0336-VL	181740137	PowerCat C6 U/UTP LS0H Cable 305M Violet B2ca-s1a,d1,a1 305m

## **MOLEX CONNECTED ENTERPRISE SOLUTIONS**

Americas Tel: +1 866 733-6659 www.molexces.com EMEA Tel: 44 (0)2392 205800 www.molexces.co.uk APAC Tel: 61 3 9971 7111 www.molexces.com.au

Issue 1

© 2018, Molex Connected Enterprise Solutions Form CAA-0336-VL Page 1 This information is correct at the time of publication, specifications are subject to change